

BS EN 10241 Mild Steel Threaded Fittings Barrel Nipples

General Specifications



Available Black (Self-Colour) & HDG Galvanised
Forged Mild Steel Fittings (Dimensions to BS EN 10241)

BSP Threaded (Taper Male/Parallel Female)

Manufactured in the EU

Maximum Pressure: 25 bar

Maximum Temperature: 230°C

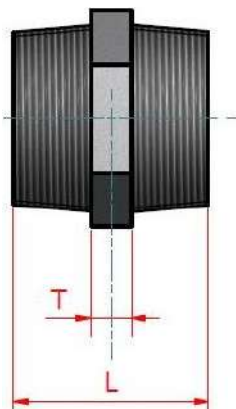

Nominal bore		Overall length dim. A	Diameter of bore dim. B		Overall length dim. L	Thickness of hexagon dim. T	Weight each
Metric	Imperial		Min. mm	Max. mm			
6mm	1/8"	25	4.5	6.0	25	6	0.03
8mm	1/4"	31	6,5	8,0	31	6	0.04
10mm	3/8"	33	8,5	10,5	33	8	0.07
15mm	1/2"	43	11,5	13,0	43	8	0.10
20mm	3/4"	48	18,0	21,0	48	10	0.17
25mm	1"	52	24,0	26,0	52	10	0.30
32mm	1 1/4"	59	30,0	32,0	59	11	0.41
40mm	1 1/2"	61	37,0	39,0	61	13	0.61
50mm	2"	68	48,0	51,0	68	14	0.61
65mm	2 1/2"	80	62,0	66,0	80	16	1.16
80mm	3"	89	75,0	79,0	89	19	1.44
100mm	4"	102	97,0	104,0	102	22	3.91
125mm	5"	115	121,0	128,0	115	25	7.50
150mm	6"	115	145,0	152,0	115	25	9.00

Manufacturing Method

Black: Fabricated
Red: Seamless