
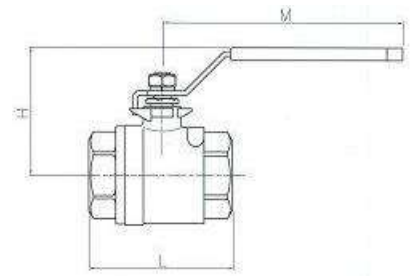


Art2008 2-Piece Stainless Steel Ball Valve

Features

1. *Stainless steel reduce port ball valve, 2 piece.*
2. *Thread ends according to ISO 7-1 (EN 10226-1).*
3. *Made of stainless steel 1.4408 (CF8M).*
4. *Ball seats PTFE + 15 % G.F.*
5. *Blow-out proof stem.*
6. *Device locking system.*
7. *Max. Working pressure 140 bar.*
8. *Working Temperature -25 °C + 180 °C.*

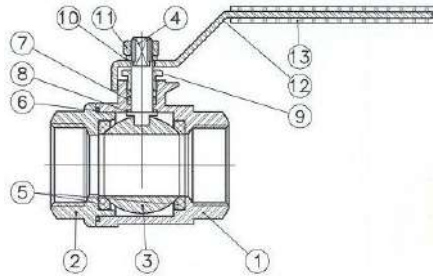


Nº	Name	Material	Surface Treatment
1	Body	Stainless Steel 1.4408	Shot Blasting
2	Cap	Stainless Steel 1.4408	Shot Blasting
3	Ball	Stainless Steel 1.4408	
4	Stem	Stainless Steel 316	
5	Ball Seat	PTFE + 15% Graphite	
6	Gasket	PTFE	
7	Trust Washer	PTFE	
8	Friction Ring	PTFE	
9	Stem Packing	Stainless Steel 304	
10	Washer	Stainless Steel 304	
11	Nut	Stainless Steel 304	
12	Handle	Stainless Steel 304	
13	Handle Sleeve	Vinyl	

General Dimensions

Ref	Size	PN	Dimensions (mm)				Weight (g)
			P	H	L	M	
2008 02	1/4"	140	9.5	42	54	105	240
2008 03	3/8"	140	9.5	42	54	105	220
2008 04	1/2"	140	13	46	61.5	105	320
2008 05	3/4"	140	17.5	53	71.7	147	600
2008 06	1"	140	22	58	84.5	168	890
2008 07	1 1/4"	140	25.4	68	92	193	1210
2008 08	1 1/2"	140	31.7	72	102.7	193	1750
2008 09	2"	140	38.1	78	118.2	193	2680

Pressure/Temperature Ratings

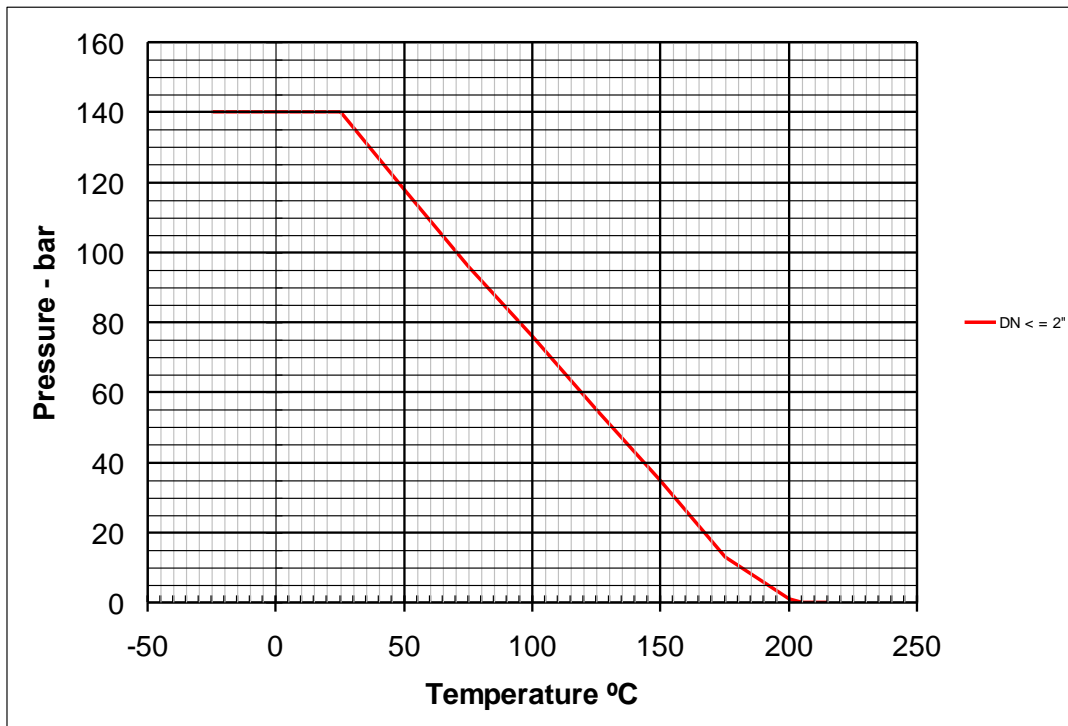

Kv Values

Kv: The rate of flow of water in cubic meter per hour that will generate a pressure drop of 1 bar across the valve.

1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
10	10	18	38	75	83	130	205