Brass Compression Fit x BSP Male Straight Adapter

Compression Fitting Specification





- Suitable for hot and cold drinking water, heating and chilled water systems.
- Designed for confined spaces and/or where the use of heat must be avoided.
- Connects a wide range of tubes in accordance with EN 1057.
- Available in duplex brass and/or dezincification resistant (DZR) brass or as dezincification immune red brass.
- Also available in chrome plated in accordance with EN 248.
- Compatible with low carbon steel, stainless steel, polyethylene (PE-X) and polybutylene (PB).
- Fast and easy to use flame-free installation.

Applications & Technical Information				
Drinking water	Υ			
Sanitary water	Υ			
Heating and chilled water systems	Υ			
Compressed air	Υ			
LPG and natural gas	Υ			
Available sizes: water	8 - 54 mm			
Available sizes: gas	8 - 28 mm (recommendation)			
Available sizes: compressed air	8 - 28 mm			
Warranty	Backed by full manufacturers product warranty			
Operating parameters: water	8 - 15 mm: 25 bar at 95°C			
	28 mm: 16 bar at 95°C			
	35 - 54 mm: 13 bar at 95°C			
Operating parameters: gas	1 bar at 30°C			
Operating parameters: compressed air	7 bar at 30°C			
Material	Brass, DZR			



Dimensions

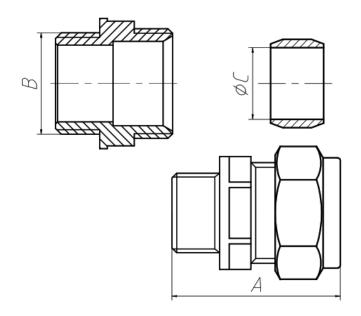



1				
MF 8mm x 1/4" M STR Comp Coupler	28	G1/4"	8	Brass
MF 8mm x 3/8" M STR Comp Coupler	29.5	G3/8"	8	Brass
MF 10mm x 1/4" M STR Comp Coupler	29.5	G1/4"	10	Brass
MF 10mm x 3/8" M STR Comp Coupler	31.5	G3/8"	10	Brass
MF 10mm x 1/2" M STR Comp Coupler	32.5	G1/2"	10	Brass
MF 15mm x 1/4" M STR Comp Coupler	31	G1/4"	15	Brass
MF 15mm x 3/8" M STR Comp Coupler	32.5	G3/8"	15	Brass
MF 15mm x 1/2 M STR Comp Coupler	33	G1/2"	15	Brass
MF 15mm x 3/4" M STR Comp Coupler	36.5	G3/4"	15	Brass
MF 22mm x 1/2" M STR Comp Coupler	38	G1/2"	22	Brass
MF 22mm x 3/4" M STR Comp Coupler	37	G3/4"	22	Brass
MF 22mm × 1" M STR Comp Coupler	42	G1''	22	Brass
MF 28mm x 1" M STR Comp Coupler	41	G1''	28	Brass
MF 28mm x 1.1/4" M STR Comp Coupler	40	G1 1/4′	28	Brass
MF 35mm x 1.1/4" M STR Comp Coupler	45	G1 1/4′	35	Brass
MF 42mm x 1.1/2" M STR Comp Coupler	51	G1 1/2'	42	Brass
MF 54mm x 2" M STR Comp Coupler	55.5	G2"	54	Brass
Description	А	В	C	Colour

