


# CADDY Macrofix 250 M8/M10



- Combo head bolt works with slotted, hex, or Phillips drivers
- Category II noise reduction according to DIN EN ISO 3822-1
- Compliant for sound insulation design according to DIN 4109
- Reaction-to-fire classification is "E" in compliance with DIN EN 13501-1:2010-01

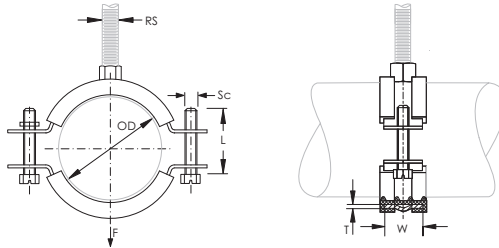

Material: Steel, EPDM-SBR Rubber

Finish: Electrogalvanized

Color: Black

Temperature: -50 to 110 °C



Part Number	Article Number	Outer Diameter OD	Pipe Size	NB/DN	Rod Size RS	Width W	Thickness T	Screw Diameter Sc	Screw Length L	Static Load F
MXD015	596460	12 – 15 mm	1/4"	8	M8, M10	20 mm	1.5 mm	M6	20 mm	1,000 N
MXD019	596470	15 – 19 mm	3/8"	10	M8, M10	20 mm	1.5 mm	M6	20 mm	1,000 N
MXD024	596480	20 – 24 mm	1/2"	15	M8, M10	20 mm	1.5 mm	M6	20 mm	1,000 N
MXD030	596490	25 – 30 mm	3/4"	20	M8, M10	20 mm	1.5 mm	M6	20 mm	1,000 N
MXD037	596500	32 – 37 mm	1"	25	M8, M10	20 mm	1.5 mm	M6	20 mm	1,000 N
MXD045	596510	40 – 45 mm	1 1/4"	32	M8, M10	20 mm	1.5 mm	M6	20 mm	1,000 N
MXD049	595859	44 – 49 mm	-	-	M8, M10	20 mm	2.0 mm	M6	20 mm	1,000 N
MXD053	595860	48 – 53 mm	1 1/2"	40	M8, M10	20 mm	2.0 mm	M6	25 mm	1,000 N
MXD058	595870	54 – 58 mm	-	-	M8, M10	20 mm	2.0 mm	M6	25 mm	1,000 N
MXD063	595880	59 – 63 mm	2"	50	M8, M10	20 mm	2.0 mm	M6	25 mm	1,000 N
MXD064	595885	62 – 64 mm	-	-	M8, M10	20 mm	2.0 mm	M6	25 mm	1,000 N
MXD073	596450	68 – 73 mm	-	-	M8, M10	20 mm	2.0 mm	M6	25 mm	1,000 N
MXD080	595890	75 – 80 mm	2 1/2"	65	M8, M10	20 mm	2.0 mm	M6	25 mm	1,000 N
MXD086	595900	82 – 86 mm	-	-	M8, M10	20 mm	2.0 mm	M6	25 mm	1,000 N
MXD091	595910	89 – 91 mm	3"	80	M8, M10	20 mm	2.0 mm	M6	25 mm	1,000 N
MXD103	595920	95 – 103 mm	-	-	M8, M10	23 mm	2.5 mm	M6	25 mm	1,000 N
MXD116	595930	108 – 116 mm	4"	100	M8, M10	23 mm	2.5 mm	M8	25 mm	1,500 N
MXD127	595940	121 – 127 mm	-	-	M8, M10	23 mm	2.5 mm	M8	25 mm	1,500 N

Part Number	Article Number	Outer Diameter OD	Pipe Size	NB/DN	Rod Size RS	Width W	Thickness T	Screw Diameter Sc	Screw Length L	Static Load F
MXD135	595980	129 – 135 mm	5"	125	M8, M10	23 mm	2.5 mm	M8	25 mm	1,500 N
MXD141	595950	135 – 141 mm	-	-	M8, M10	23 mm	2.5 mm	M8	25 mm	1,500 N
MXD162	595960	159 – 162 mm	-	-	M8, M10	23 mm	2.5 mm	M8	25 mm	1,500 N
MXD168	595970	165 – 168 mm	6"	150	M8, M10	23 mm	2.5 mm	M8	25 mm	2,200 N
MXD202	595971	198 – 202 mm	-	-	M8, M10	25 mm	3.0 mm	M8	30 mm	2,500 N
MXD215	595972	210 – 215 mm	-	-	M8, M10	25 mm	3.0 mm	M8	30 mm	2,500 N
MXD220	595973	216 – 220 mm	8"	200	M8, M10	25 mm	3.0 mm	M8	30 mm	2,500 N
MXD227	595990	220 – 227 mm	-	-	M8, M10	30 mm	3.0 mm	M8	30 mm	2,700 N
MXD254	595991	249 – 254 mm	-	-	M8, M10	30 mm	3.0 mm	M8	30 mm	2,700 N
MXD280	595992	274 – 280 mm	-	-	M8, M10	30 mm	3.0 mm	M8	30 mm	2,700 N
MXD319	595993	313 – 319 mm	-	-	M8, M10	30 mm	3.0 mm	M8	30 mm	2,700 N

Lining is EPDM rubber.